


WARNING AT YOUR FINGERTIPS WITH THE W-3000

The WeatherWarn PC siren controller provides graphical user interface which allows for activation and monitoring of your Whelen siren system manually or automatically. This flexible platform allows for extensive customization and usability.

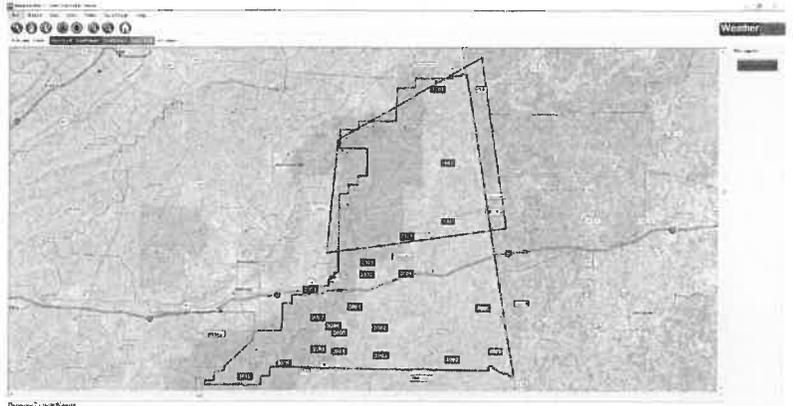

Automatic National Weather Service Polygon Activation

The National Weather Service issues warnings that can be received over the internet or locally on a satellite receiver. This feed can be utilized to automatically activate a Whelen siren system. Based on user defined input, the system can be activated for any number of warnings including tornado, thunderstorm or civil emergencies. The user can also define if the entire system or only those sirens within the polygon are activated.

Automatic activation can easily be turned off during "normal" operational hours if the user chooses. In manual mode, the system will receive the polygon warning from the NWS, populate what units need to be activated and await approval from an operator before activating the system. This flexibility allows the user to have full control of operating procedure.

Our capability to activate automatically or manually extends to Whelen sirens as well as any other manufacturer that uses DTMF or two tone sequential.



Full Diagnostic Feedback

Full diagnostic feedback allows the user to silent test the system and receives status information for each unit to include communication path, partial or full driver/amp failure, AC power presence and DC voltage. This capability is with sirens manufactured by Whelen Engineering.




Social Networking

In today's world of ever changing technology, it is important to utilize all available methods of alerting your public during a time of emergency. The Weather-Warn W-3000 offers the option to relay emergency information in conjunction with Whelen siren system activation. Whether automatically or manually, the system can be configured to send out a "tweet" via twitter account or post a Facebook status update to a specific account. This allows users to have information in an instant via smart phone or PC.



Other Features

- All call, group/zone or single siren activation
- User defined polygon activation
- Custom call keys—prescript scenarios for possible known events
- Mapping options for normal day map or hybrid satellite map (internet feed)
- Capable of live PA and .wav file from PC over live PA
- Supports activation of Whelen prerecorded message boards
- Configurable time of day automatic activation for testing or other "routine" activations
- Activation of other DTMF or Two Tone capable sirens (requires each unit to be individually addressable, some configuration changes might be required)
- Interfaces with conventional radio, digital radio or landline
- Standard Microsoft Windows 7 based platform
- Supports automatic telephone or SMS text notification to specific personnel

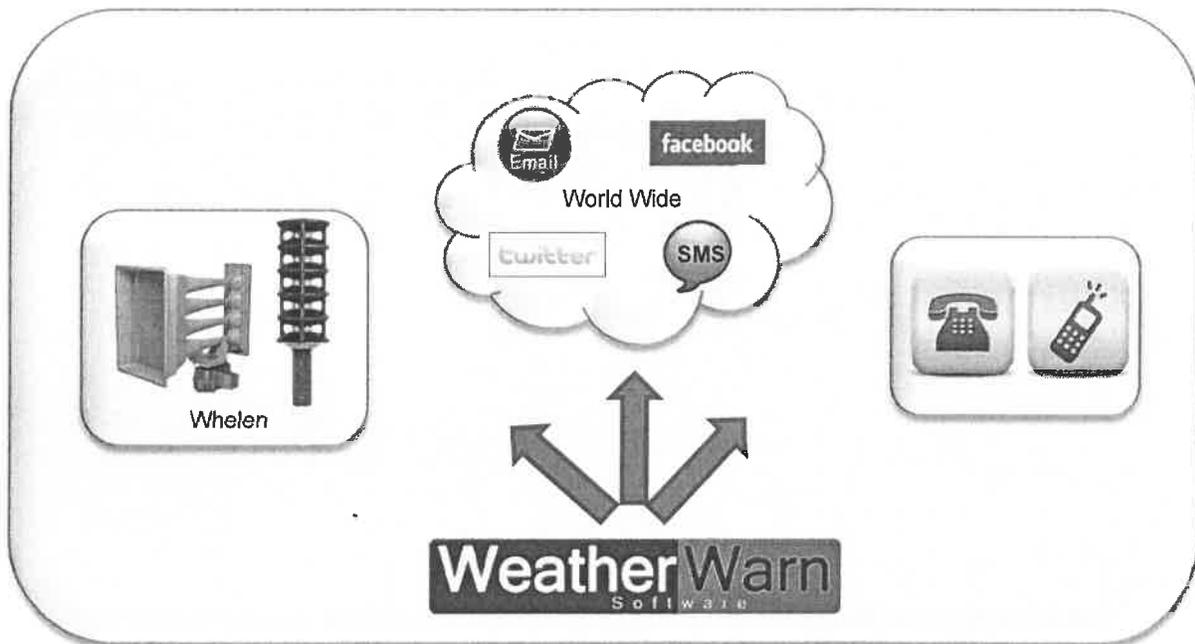

Contact us today for more information or a complimentary demonstration!

RAGAN COMMUNICATIONS
2 RAGAN CT.
WASHINGTON, IL 61571
(309) 745-9386
ragancom@comcast.net

REV-71416-DLR



Ragan Communications Inc.

Phone: 309-745-9386
Fax: 309-745-3215
2 Ragan Court
Washington, IL 61571

Quote

No.: **6008**
Date: 5/30/2019

Prepared for:

MORTON POLICE DEPARTMENT
375 W. BIRCHWOOD
MORTON, IL 61550 U.S.A.

Prepared by: Neal F. Ragan

Account No.: 339
Phone: (309) 266-6666
Fax: (309) 263-0321

Quantity	Item ID	Description	UOM	Sell	Total
1	W-3000	Weather Warn Sys w NWS less than 50 sirens	EA	\$9,935.00	\$9,935.00
1	W-MA1Y	SOFTWARE MAINTENANCE AGREEMENT	EA	\$2,150.00	\$2,150.00
1	W-CONFIG	SYSTEM CONFIGURATION	EA	\$1,600.00	\$1,600.00
1.00	LABOR - GENERAL	INSTALLATION AT MORTON PSAP	HR	\$880.00	\$880.00

Your Price: \$14,565.00

Total: \$14,565.00

Prices are firm until 6/29/2019 Terms:

Prepared by: Neal F. Ragan, ragancom@comcast.net

Date: 5/30/2019

IF MORE THAN ONE RADIO WILL BE USED FOR ACTIVATION ADD \$915.00 FOR EACH ADDITIONAL RADIO REQUIRED

Accepted by: _____

Date: _____

Disclaimer

SHIPPING COST NOT INCLUDED