





brandys
bees

Brunks

ECARY






Your Requested Part Numbers

HL-N Gooseneck Arm

HL-N



Item Code: HL-N

- Fixture: HL-N, 19" Gooseneck Arm (1/2" NPT)
- Gooseneck Arm Color: **Black - Wet Rated**
- Gooseneck Arm Accessory: None
- **SKU: /HL-N-91**

** This product is made to order and will take between 7 and 12 business days.*

The Classic Warehouse Shade Ceiling Fan Kit



Item Code: H-15112, 12"-16"

- Fixture: 16" Shade
- Finish: **Black** - Shade White Interior - Wet Rated
- Mount Threading: 1/8" IPS for Fan Kit
- Wire Guard Option: None
- Lamp Selection: Standard Incandescent Medium Base E26 Socket
- **SKU: H-15116-91/1/8" IPS/INC**

** This product is made to order and will take between 5 and 10 business days.*



**HI-LITE MFG.
CO., INC**

13450 Monte Vista Avenue
Chino, California 91710
Telephone: (909) 465-1999
Toll Free: (800) 465-0211
Fax: (909) 465-0907
web: www.hilitemfg.com
e-mail: sales@hilitemfg.com

H-15116 Warehouse Shade Collection

Job Name:


Brunks

Type:

Exterior up high. Arm to match

Quantity:

4

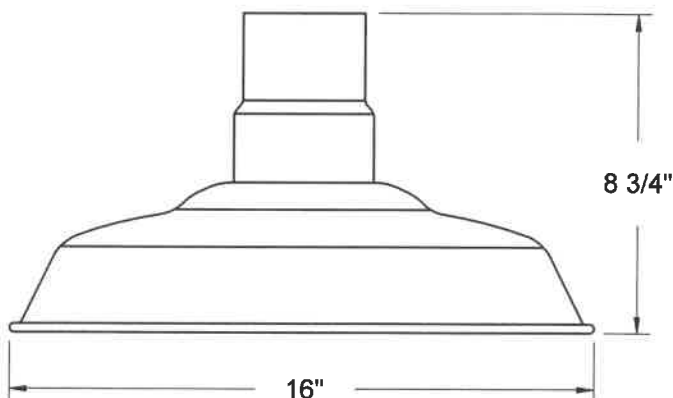

FINISH -Multi-stage pretreatment procedure using materials of polyester/polished powder coat, baking enamel liquid, raw metals, and galvanized finishes.

Standard Finishes are: **91(Black)**, 93(White), 95(Dark Green), 96(Galvanized), BR47(Powder Coat Rust), BK01(Black Texture), GN20(Powder Coat Patina).

Upgraded Finishes are: 29, 66, 82, 90, 92, 94, 97, 99, 100, 103, 104, 105, 110, 112, 113, 114, 115, 117, 118, 119, 120, 127, 128, 129, 133, 134, 135, 136, 138, 139, 140, 11, 98, 101, 102, 137, 121, 122, 123, 124, 125, 126, 01, 22, 25, 33, 77, 89, 24, 44, 48, 49, 15, 16, 55.

(Custom finishes available).

For interior finish of fixture refer to color chart on pages 344-348.

MOUNTING - Cord, Stem, Arm, and Flush mounting available.

ACCESSORIES - CGU(Cast Guard and Glass), LCGU(Large Cast Guard and Glass), WGU(Wire Guard and Glass), LWGU(Large Wire Guard and Glass), ARN(Acorn Globe), LARN(Large Acorn Globe), WGR(Wire Guard), SK(Swivel Knuckle) and FX(Flexible tubing for cord mounted fixture only) available.

REFLECTOR - Heavy duty, spun shade, aluminum 6061-0 and/or 1100-0, galvanized 22 gauge, steel 20/22 gauge, copper 032/040 and brass 032/040 construction. Dependant on finish.

SOCKETS/LAMPS - Available in:

Incandescent

- rated 200 watt max/120 volt, medium base.

Compact Fluorescent(CFL)

- rated 13/18/26/32/42/57 watt max/120/277 volt, GX24Q base.

Metal Halide(MH)

- rated 35/50/70/100/150/175 watt max/120/208/240/277 volt, medium base, 4KV socket.

High Pressure Sodium(HPS)

- rated 50/70/100/150 watt max/120/277 volt, medium base.

Light-Emitted Diode(LED)

-See LED specification sheet.

MADE IN THE U.S.A.

Suitable for wet location.
(Except when cord mounted)





Job Name:

Brunks

Type:

Arm



Quantity:

4

HL-N

HI-LITE MFG. CO., INC

13450 Monte Vista Avenue
Chino, California 91710
Telephone: (909) 465-1999
Toll Free: (800) 465-0211
Fax: (909) 465-0907
www.hilitemfg.com

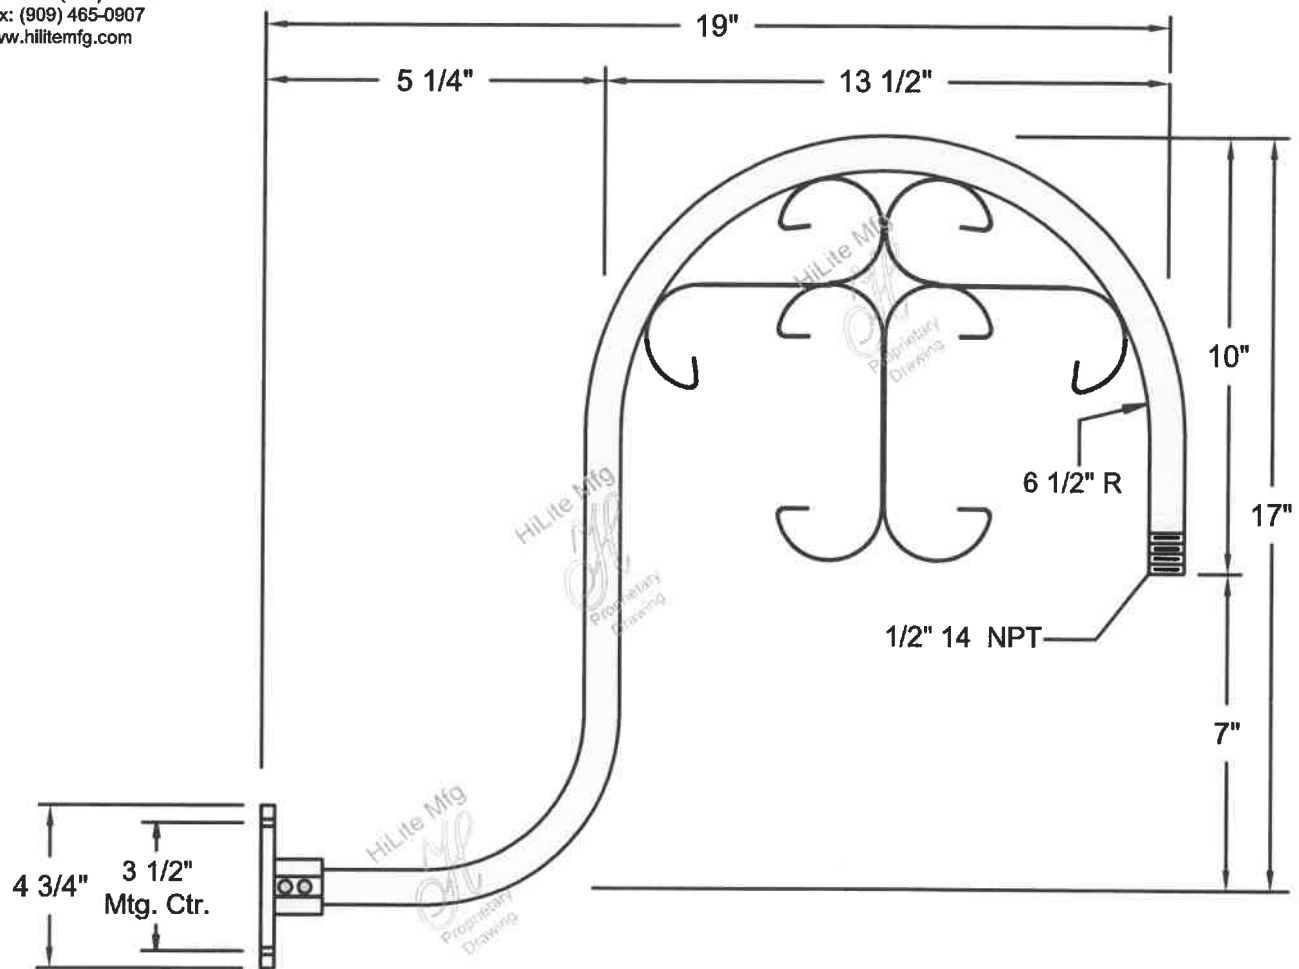

Note: Not available in steel,
copper, brass or specialty
finishes.

MOUNTING DETAIL

- (7) Lighting: Historic light fixtures are important architectural elements in a commercial downtown area such as the Washington Square. These lights should be retained and maintained when possible, and new light fixtures should be unobtrusive.
- (a) Historic light fixtures should be retained and maintained when possible. Damaged or deteriorated fixtures should be maintained using methods that allow them to retain their historic appearance.
 - (b) If light fixtures are beyond repair, property owners should replace them with lights similar in style, size, and color.
 - (c) If light fixtures are desired where there were no historic fixtures, the fixtures should be unobtrusive, conceal the light source, and point light toward the building.
 - (d) Upon installing light fixtures, new or original, the building should not be damaged in any way.